



## PS-M 36S


### MONO-CRYSTALLINE SOLAR PANEL

#### PHILADELPHIA SOLAR MODULES

Philadelphia mono-crystalline solar modules in maximum power of 90 Wp are produced with state-of-the-art robotic production line. These modules are suitable for use in most electrical power application and have excellent durability to prevailing weather conditions.

#### FEATURES

- High-efficiency 5" solar cells ensure high performance of the solar module and create more power under the same conditions.
- Bypass diodes minimize the power drop caused by shade.
- High transparency low-iron tempered glass, EVA laminate and weatherproof back sheet, plus heavy duty anodized/PVDF Coated aluminum frame.
- Output terminals have water proof connectors.
- TUV Certificate (PV-192565-001-TA-rev1).
- Produced under systematic quality control covering all processes and factors.

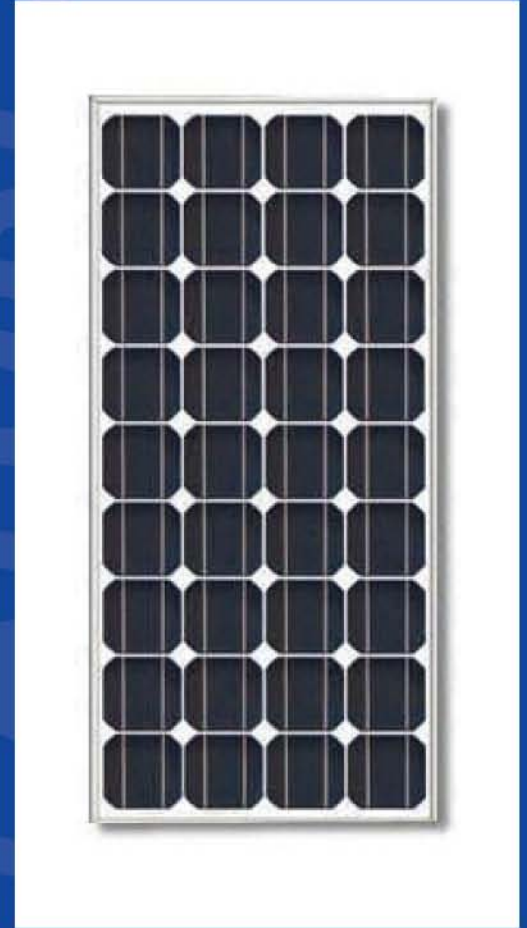

Unique design on drainage slots for vertical and horizontal constructions to avoid deforming due to freezing weather



Our Photovoltaic Modules are successfully qualified according to their Design, Performance and Safety.



High output performance  
Long term reliability  
Sufficient reverse current  
Good resistance to mechanical loads



CEI EN 61215 (2006)  
CEI EN 61730-1 (2007)  
CEI EN 61730-2 (2007)  
MCS BBA 0026



**Philadelphia**  
**Solar**


Delivering Clean Energy Solutions

**90 Watt**

**MONO-CRYSTALLINE SOLAR PANEL**

## Product **PS-M 36S**

ELECTRICAL DATA - (STC)	UNIT	VALUES
Nominal Power $\pm 5\%$ [ $W_p$ ]	$P_{nom}$	90
Voltage at Nominal Power [V]	$V_{mpp}$	18.10
Current at Nominal Power [A]	$I_{mpp}$	4.98
Open-circuit Voltage [V]	$V_{oc}$	22.28
Short-circuit Current [A]	$I_{sc}$	5.67
Voltage Temperature Coefficient	$mV/cell/C^\circ$	-2.12
Current Temperature Coefficient	$mA/cell/C^\circ$	2.50
Power Temperature Coefficient	$\%/C^\circ$	-0.43
Module Efficient [%]	$\eta'$	13.6

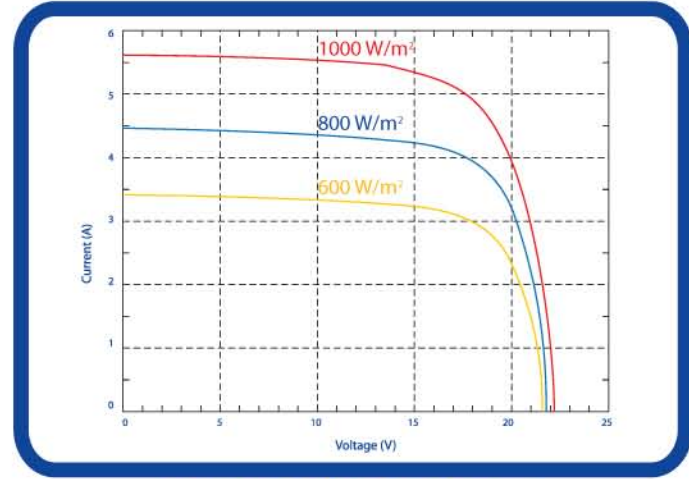

**Current - Voltage Curve**

MODULE COMPONENTS	VALUES
Solar Cells per Module	36 (4 x 9) in series
Cell Type	Mono-crystalline silicon, 125 x 125 mm <sup>2</sup> - Pseudo Square
Connection	Junction Box IP65 with 2 Bypass diods, Solar Cable (length 0.8m - cross section 4mm <sup>2</sup> ) with MC4 interconnection
Front Surface	Low Iron 3.2mm Thick Pattern Solar Glass
Frame Material	Anodized Aluminum

DIMENSIONS and WEIGHT	VALUES
Dimensions [mm]	1215 x 545 x 45
Weight [kg]	~ 9

LIMITS	VALUES
System Voltage [ $V_{oc}$ ]	1000
Maximum Reverse Current $I_{rc}$ [A]	15
Operating Module Temperature [ $C^\circ$ ]	-40 to +85
Fire Classification	C

WARRANTY	VALUES
Power Output	10 Years 90% of Minimum Power Output 25 Years 80% of Minimum Power Output
Product	5 Years

